KEY:

Proposed Diamond Sawn Stone Sett Paving

PROPOSED WORKS
SCALE 1:200

Reinstate road markings upon completion of surfacing works

Existing gullies to be removed and replacements provided, to allow for surface water to be drained effectively

Existing dropped kerb crossing points to be removed and levels increased to match remainder of footways.

Existing stone flags to be re-used where possible, with reclaimed flags provided where necessary

Construct crossing points using diamond sawn sett paving, as shown in Example A below

Road hump warning signage to be provided on Albert Road and Frank Street approaches

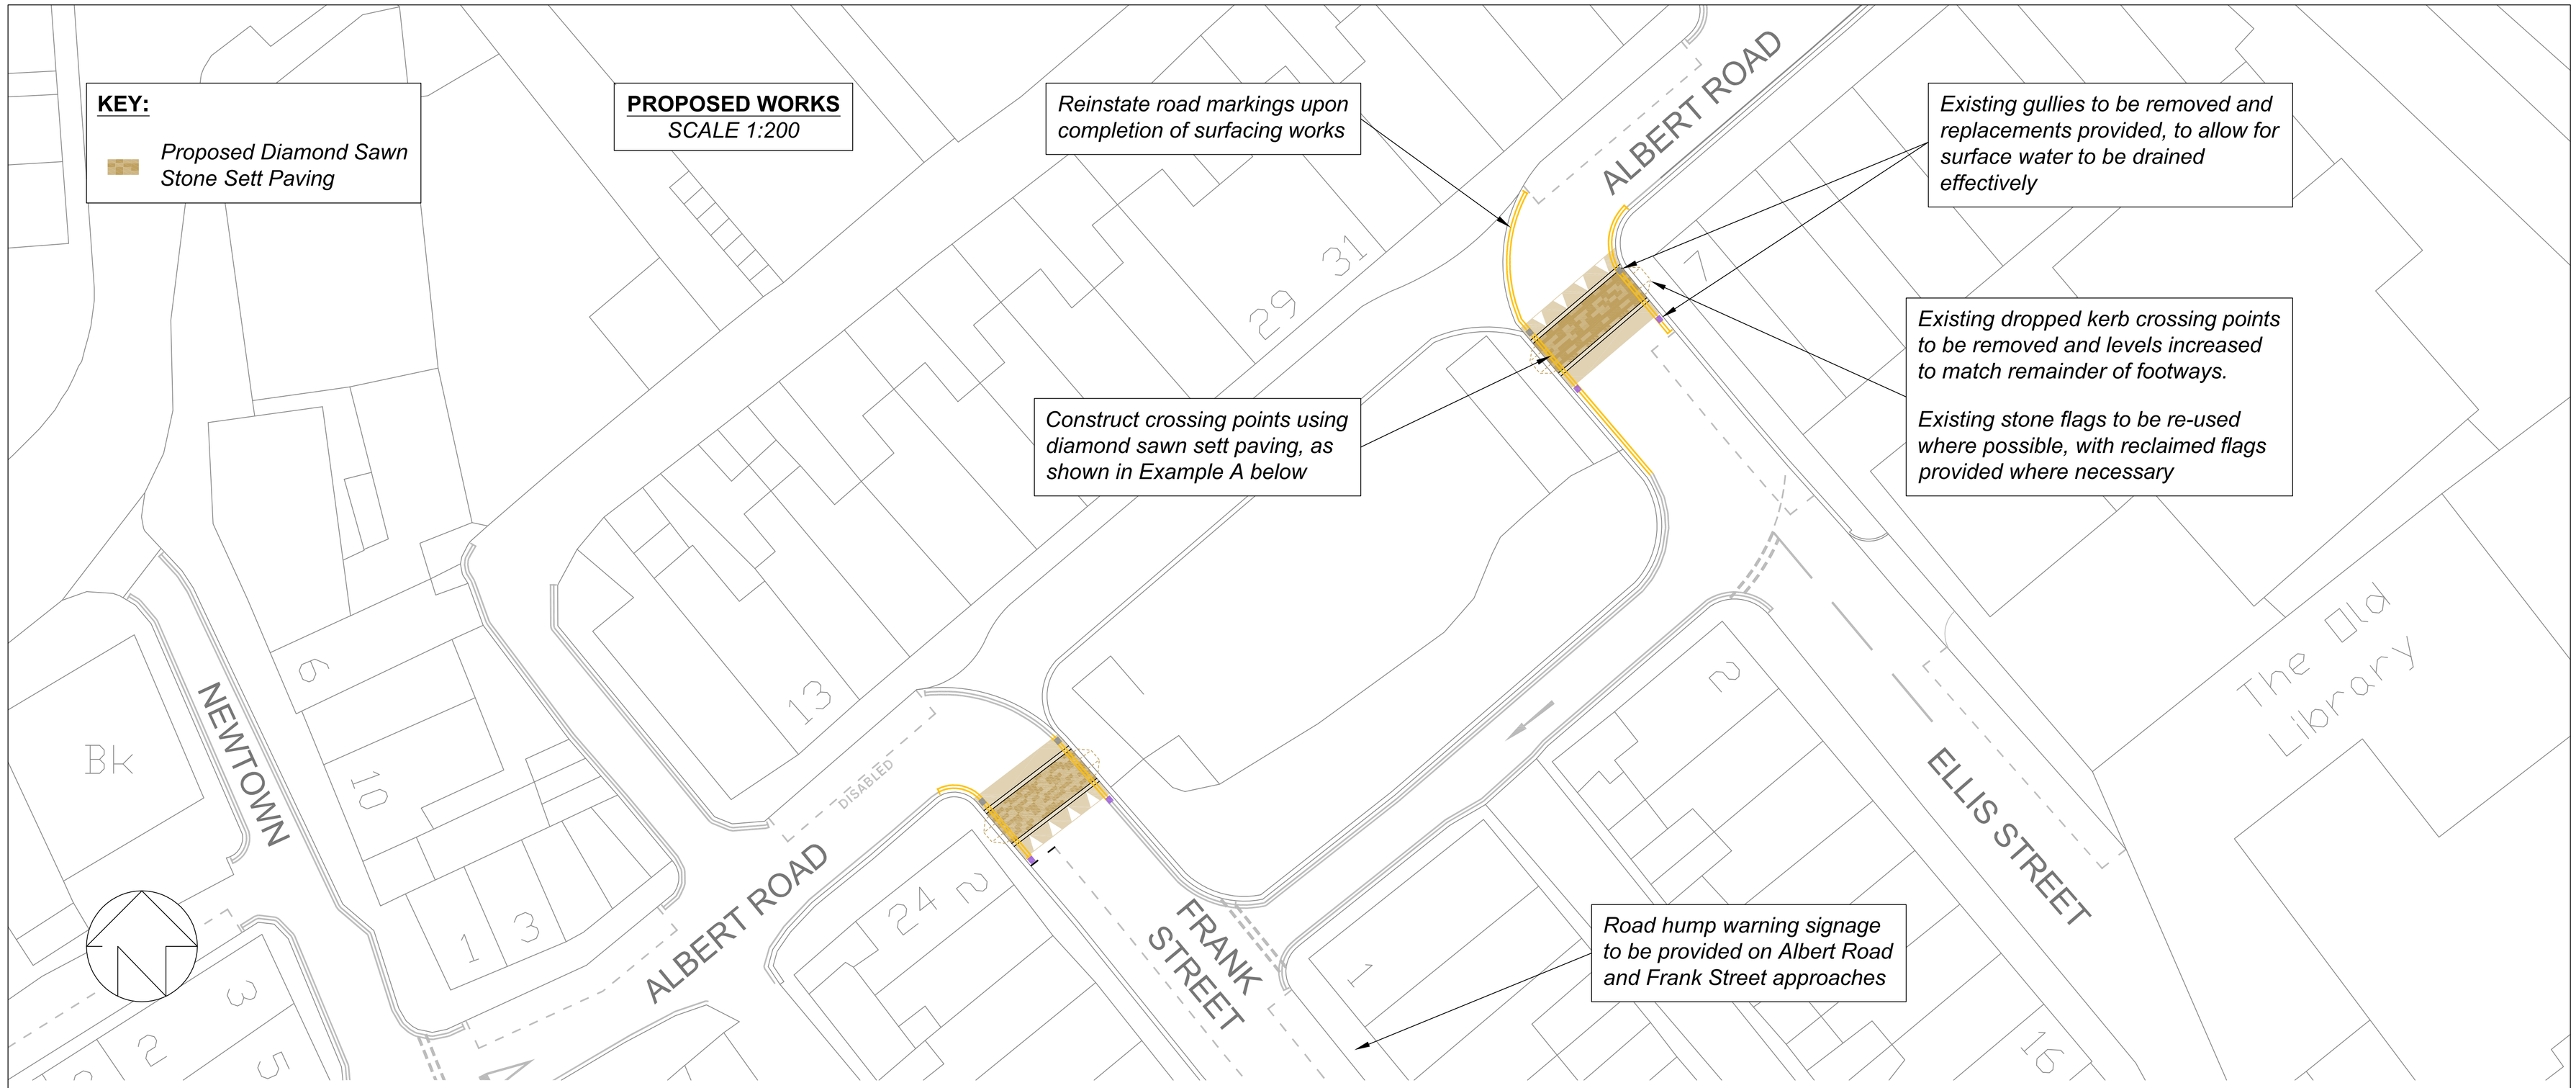

SECTION DETAIL:
SCALE 1:10

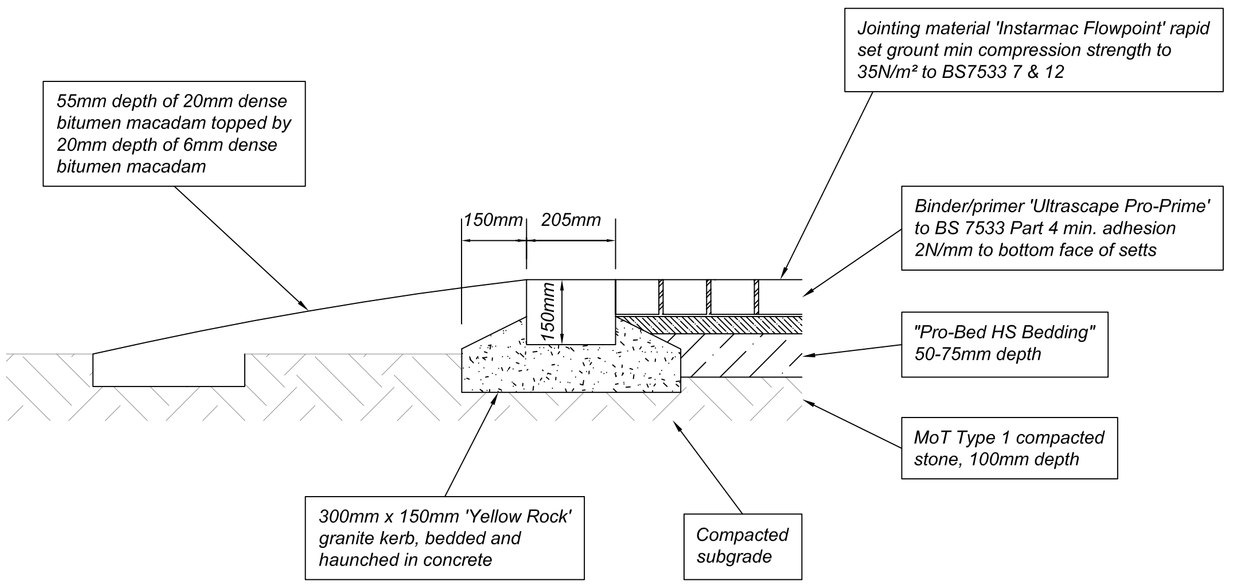

EXAMPLE A:
DIAMOND SAWN STONE SETT PAVING

Borough of Pendle

Neighbourhood Services
Manager: Peter Atkinson BSc (Hons) DipT CEng MICE MCIHT
Elliott House, Market Square, Nelson. BB9 0LX
Tel: (01282) 661661 Fax: (01282) 661068

PROJECT: Ellis Street/Frank Street, Barnoldswick	**DESCRIPTION:** Surfacing Improvements: Committee Plan	**DRAWN BY:** N Y	**CHECKED:** ScW	**DATE:** 17 December 2018
		FILE REF: /	**SCALE:** As Stated	**DRAWING NUMBER:** E0552D / 4